



# 康伟栅栏式PCB接线端子

产品规格书

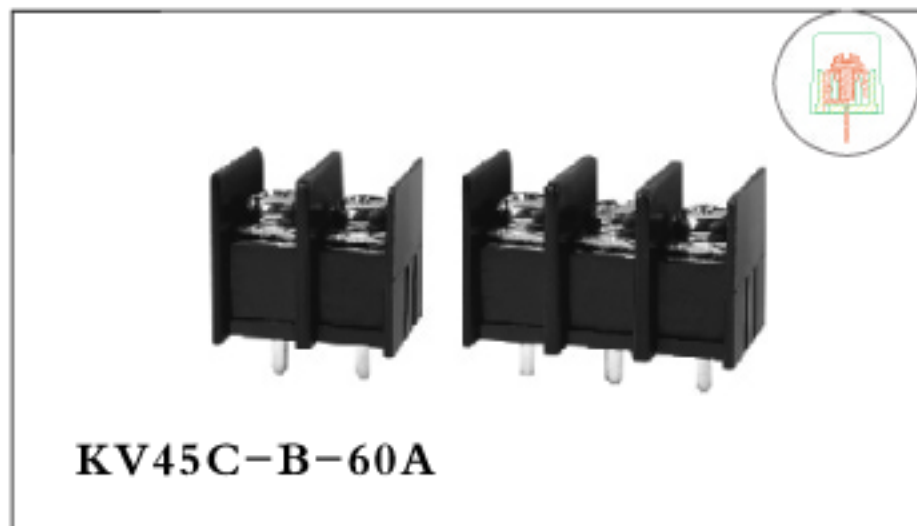


KV45C-B-60A

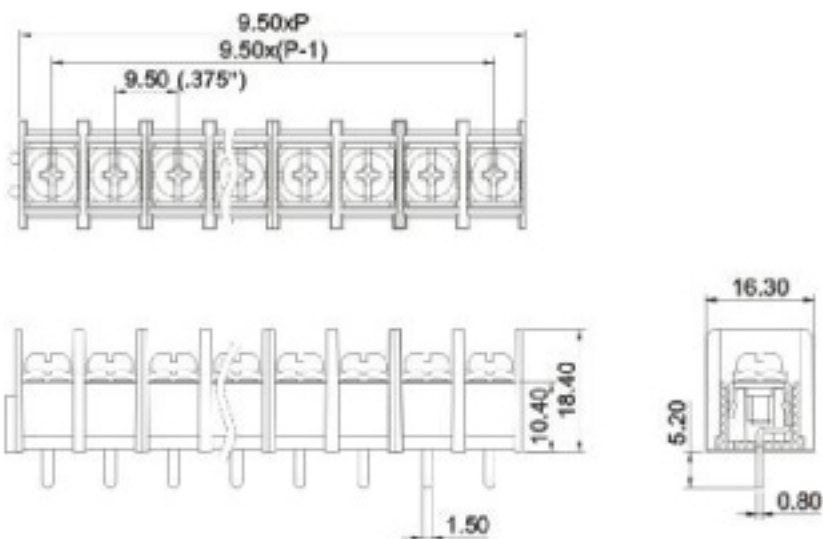

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	20.90	30.40	39.90	49.40	58.90	68.40	77.90	87.40	96.90	106.40	115.90	125.40	134.90	144.40
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	153.90	163.40	172.90	182.40	191.90	201.40	210.90	220.40	229.90	239.40	248.90			
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	

认证		
电气性能		
参考标准	UL	IEC
额定电压	300V	750V
额定电流	25A	32A
导线线径	22-12AWG	4.0mm <sup>2</sup>
耐电压	AC2000V/1Min	
绝缘阻抗	500MΩ/DC500V	
机械性能		
最大锁紧扭力	1.2Nm/10.6Lb.in	
环境温度	-40℃~+105℃	
尺寸		
间距	9.5mm(.375")	
极数	2P-24P	
材质及电镀		
塑件	PA66, UL94V-0	
端子	黄铜, 0.8厚 镀锡	
螺丝	钢, M4标准	

## 订购方式:

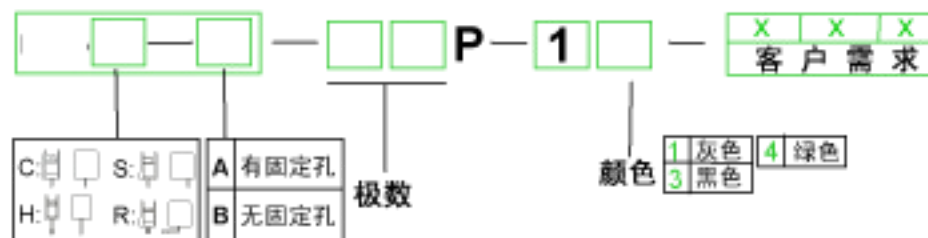

		中国·康伟电子有限公司
	NAME	KV45C-B-60A