


# 康伟栅栏式PCB接线端子


产品规格书



认证	UL	CE
电气性能	UL	IEC
参考标准	300V	750V
额定电压	30A	32A
额定电流	22-10AWG	4.0mm <sup>2</sup>
导线线径		AC2000V/1Min
耐电压		500MΩ/DC500V
绝缘阻抗		
机械性能		
最大锁紧扭力		1.2N.m 10.6Lb.in
环境温度		-40℃~+105℃
尺寸		
间距		11.11mm(437")
极数		2P-12P
材质及电镀		
塑件		PA66,UL94V-0
端子		黄铜,0.8厚 镀锡
螺丝		钢, M4镀锌

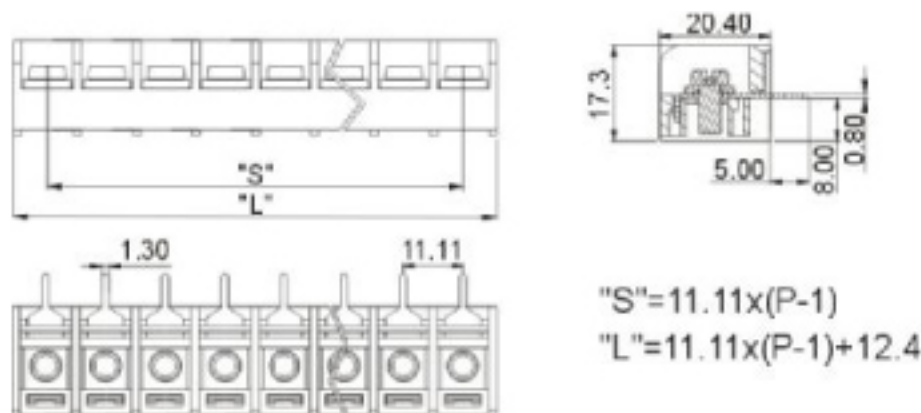

订购方式:

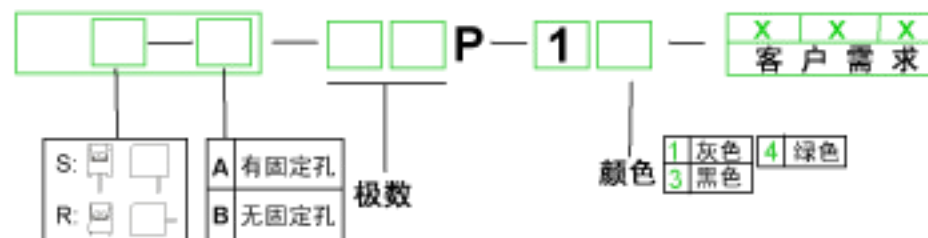

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	23.51	34.62	45.73	56.84	67.95	79.06	90.17	101.28	112.39	123.50	134.61	145.72	156.83	167.94
S(mm)	11.11	22.22	33.33	44.44	55.55	66.66	77.77	88.88	99.99	111.10	122.21	133.32	144.43	155.54
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	79.06	90.16	101.27	112.38	123.49	134.60	145.71	156.82	167.93	179.04	190.15			
S(mm)	66.66	77.77	88.88	99.99	111.10	122.21	133.32	144.43	155.54	166.65	177.76			

		中国·康伟电子有限公司
	NAME	<b>KV66R-B</b>