




康伟栅栏式PCB接线端子

产品规格书

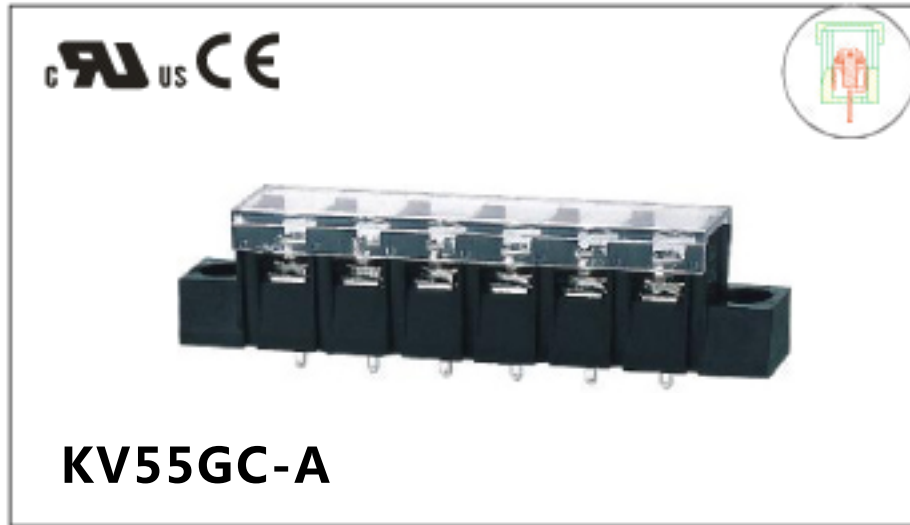


KV55GC-A

认证	UL US CE	
电气性能	UL	IEC
参考标准	UL	IEC
额定电压	300V	750V
额定电流	20A	32A
导线线径	22-12AWG	4.0mm ²
耐电压	AC2000V/1Min	
绝缘阻抗	500MΩ/DC500V	
机械性能		
最大锁紧扭力	1.2N.m 10.6Lb.in	
环境温度	-40℃~+105℃	
尺寸		
间距	10.0mm(.394")	
极数	2P-20P	
材质及电镀		
塑件	PA66+23%GF, UL94V-0	
端子	黄铜, 0.8厚, 镀锡	
螺丝	钢, M4镀锌	

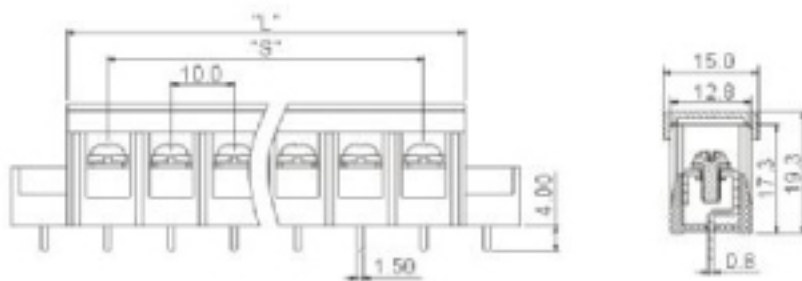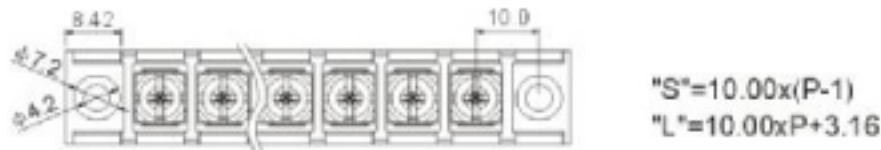

订购方式:

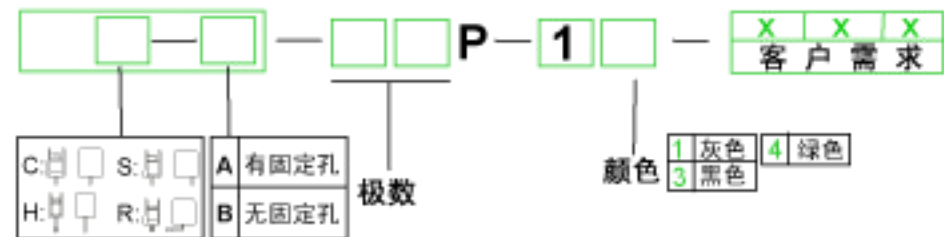

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	23.16	33.16	43.16	53.16	63.16	73.16	83.16	93.16	103.16	113.16	123.16	133.16	143.16	153.16
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	163.16	173.16	183.16	193.16	203.16	213.16	223.16	233.16	243.16	253.16	263.16			
S(mm)														

	中国·康伟电子有限公司
	NAME KV55GC-A