


康伟栅栏式PCB接线端子

产品规格书




KV46GR-B

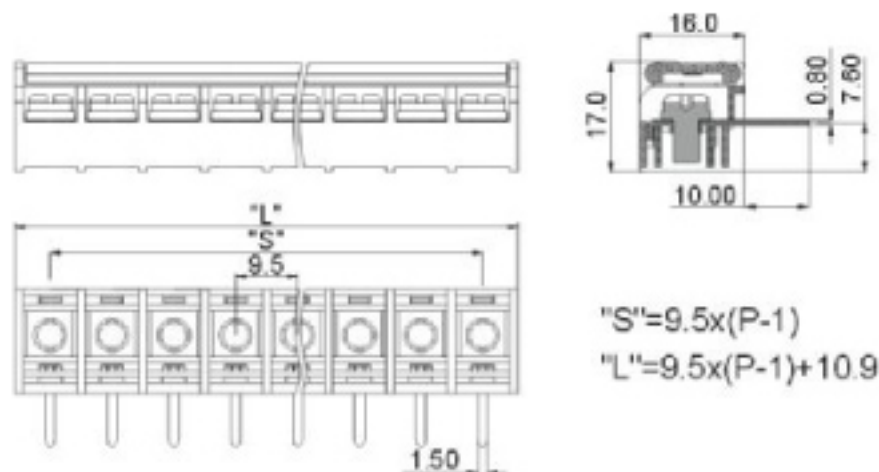

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	20.40	29.90	39.40	48.90	58.40	67.90	77.40	86.90	96.40	105.90	115.40	124.90	134.40	143.90
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	53.40	62.90	72.40	81.90	91.40	100.90	110.40	119.90	129.40	138.90	148.40			
S(mm)	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00	142.50	152.00	161.50	

认证	UL	CE
电气性能		
参考标准	UL	IEC
额定电压	300V	750V
额定电流	20A	32A
导线线径	22-12AWG	4.0mm ²
耐电压		AC2000V/1Min
绝缘阻抗		500MΩ/DC500V
机械性能		
最大锁紧扭力		1.2N.m 10.6Lb.in
环境温度		-40℃~+105℃
尺寸		
间距		9.5mm(375")
极数		2P-12P
材质及电镀		
塑件		PA66, UL94V-0
端子		黄铜, 0.8厚 镀锡
螺丝		钢, M4镀锌

订购方式:

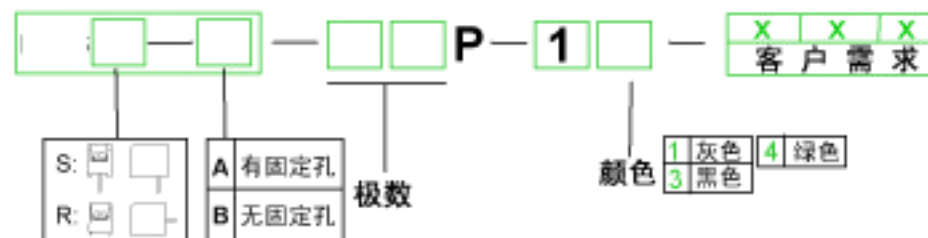

	中国·康伟电子有限公司
	NAME KV46GR-B