

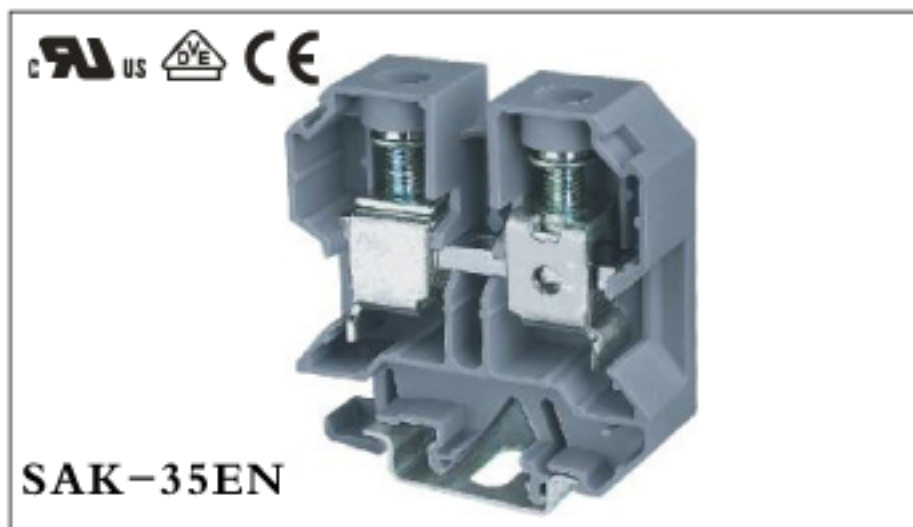


# 康伟SAK/JXB导轨式接线端子


产品规格书

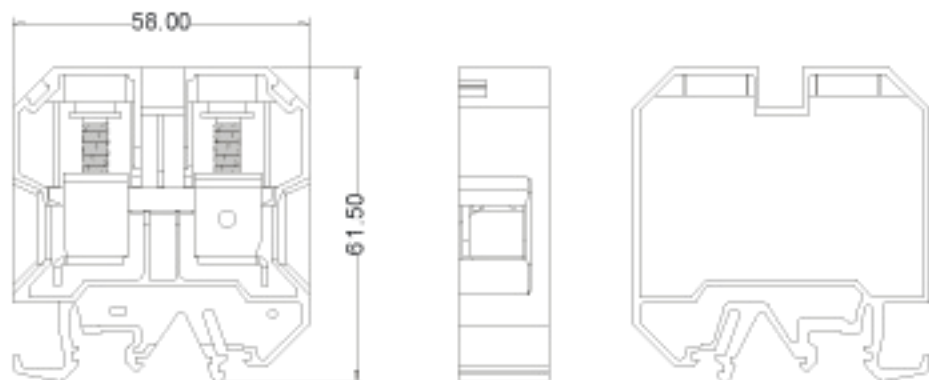

认证	UL US		IEC
性能标准	UL	IEC	
额定电压	600V	1000V	
额定电流	155A	125A	
线径	12-2AWG	10-35mm <sup>2</sup>	
厚度/宽度/螺板/厚度	16/56/5.5mm		
高度 (NS35 7.5/NS35-15/NS32)	63.5/71.6/3.5mm		
额定冲击电压/污染等级	8kV/3		
制线长度	18mm		
螺钉规格/扭矩	M2.5/M 0.55, b-in		
绝缘材料/阻燃等级	PAV-0		
说明	型号	包装数	
(1) 端子	MK35	20	
(2) 螺板	D-MK35	50	
(3) 分組隔板	DTW-35	50	
(4) 隔片			
(5) 联络组件	Q 2-35	20	
	Q 3-35	20	
	Q 4-35	20	
	Q 10-35	20	
(6) 可拆分的联络组件	VL-35	50	
	Vh 24.5	50	
	BS-MK25	100	
(7) 闪电标记牌	AD 3-35		
	AD 4-35		
(8) 标记牌	DEK 6		

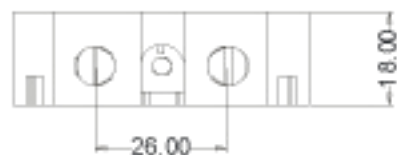

订购方式:

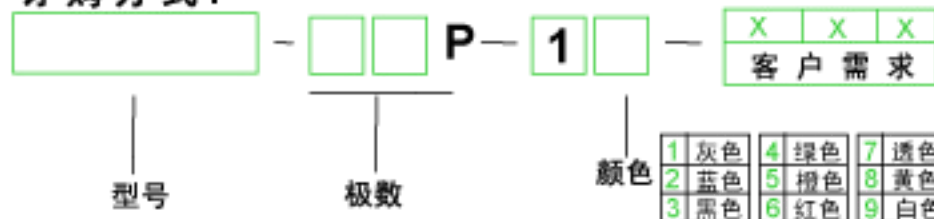

		中国·康伟电子有限公司
	NAME	<b>SAK-35EN</b>